


HCM0603A

◆ Dimension

Unit: mm


Tolerance: ± 0.3 mm

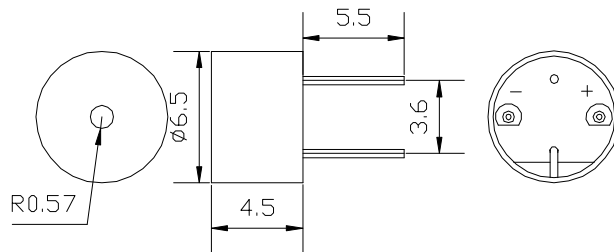

◆ Frequency Response

Applied Voltage: 3.6V Duty Square

Wave Measuring Distance: 10cm

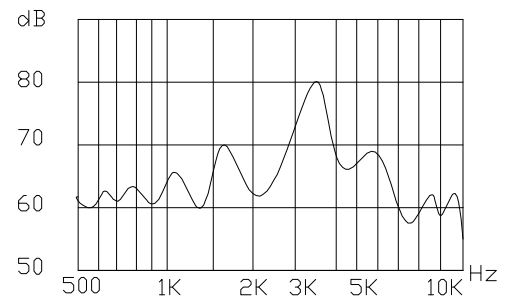

◆ Requirement

Rated Voltage:	3.6V
Operating voltage:	2~5V
Output S.P.L:	≥ 75 dB
Rated current:	≤ 80 mA
Coil Resistance:	$18 \pm 2 \Omega$
Rated Frequency:	3200Hz
Product Weight:	0.3g
Operating Temp.:	-20~+60°C
Storage Temp.:	-30~+70°C
Housing Material:	PPO