

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM16D SERIES :

| Type | HCM1606D | HCM1612D |
|----------------------|-------------------|----------|
| Rated Voltage(V) | 6 | 12 |
| Operating Voltage(V) | 3~12 | 6~18 |
| Rated Current(mA) | ≤40 | |
| Coil Resistance(Ω) | 45±7 | 115±17 |
| ◎Coil Impedance(Ω) | 110 | 200 |
| Output S.P.L(dB) | ≥85 | |
| Rated Frequency(Hz) | 2048 | |
| Operating Temp.(°C) | -30~+85 | |
| Storage Temp.(°C) | -40~+85 | |
| Housing Material | Noryl - SE1- GFN2 | |
| Weight (g) | 7 | |

◆ Dimension

Unit:mm


Tolerance:±0.3mm

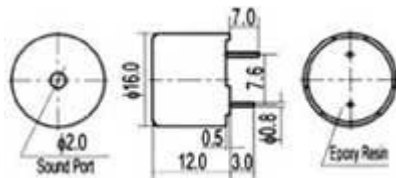

◆ Frequency Response

Applied Voltage : 6V, 50% Duty Square Wave

Measuring Distance : 10cm

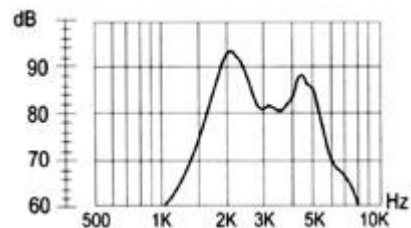

Shen Zhen Tianer Technology CO.,Ltd.
 NO.421,4th Floor,KangLe Building,HuaQingNorth
 TEL:0086-755-82799228
 Mobile:(0)13603060099
 E-mail:office@youbuzzer.com
<http://www.itianer.com>