

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM16X SERIES:

Type	HCM1606X	HCM1612X
Rated Voltage (V)	6	12
Operating Voltage (V)	4~8	8~15
Rated Current (MA)	< 30	< 30
Sound Output at 10cm (dB)	> 85	> 85
Resonant Frequency (Hz)	2300 ±300	2300 ±300
Response Time (ms)	< 50	< 50
Operating Temperature (C)	-25~+70	-25~+70
Storage Temperature (C)	-30~+80	-30~+80
Weight (g)	7	7

Value applying rated voltage (DC)

Value applying(Min. operational DC voltage)

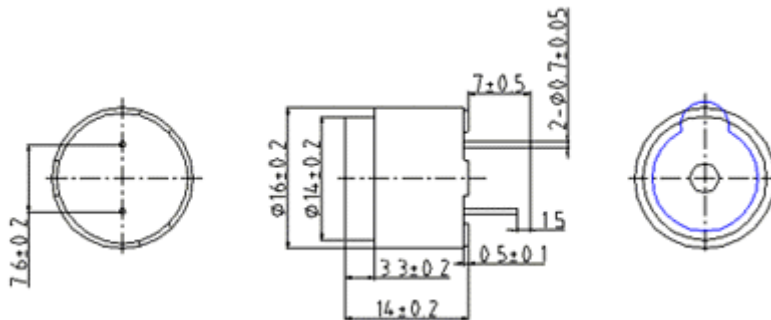

Shen Zhen Tianer Technology CO.,Ltd.

NO.421,4th Floor,KangLe Building,HuaQingNorth

TEL:0086-755-82799228

Mobile:(0)13603060099

E-mail:office@youbuzzer.com

http://www.itianer.com